


PERMANENT TREE PROTECTION DETAIL (TREE WELL)

(WHEN FINISHED GRADE IS 1'-0" OR MORE ABOVE EXISTING GRADE)

NOTE: WELL TO BE CONSTRUCTED OF STONE OR BRICK(ALL HEADERS). IF BRICK IS USED, VERTICAL JOINTS TO BE LEFT OPEN FOR DRAINAGE 1/2" MAXIMUM INSIDE FACE OF WALL.

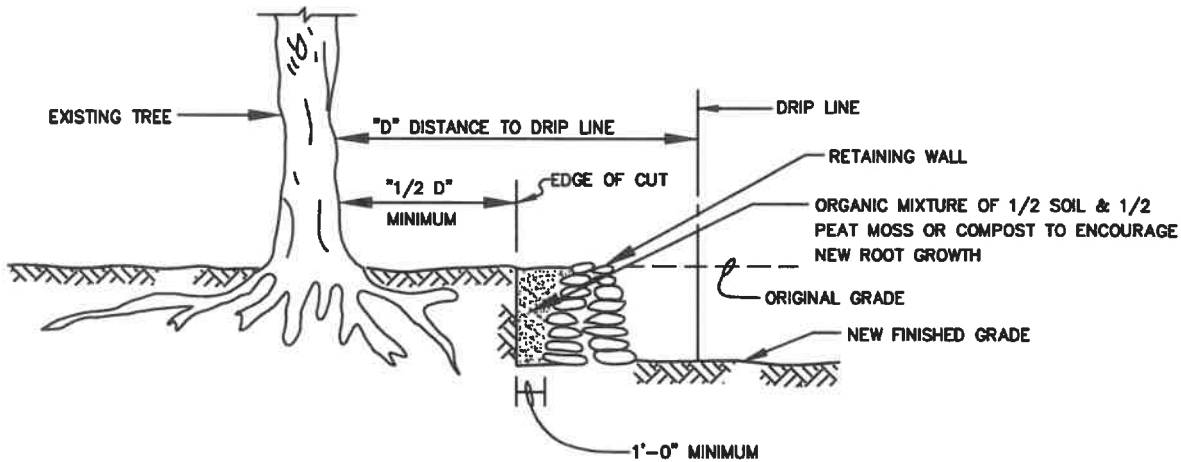

PERMANENT TREE PROTECTION DETAIL(GROUND LOWERING)

(WHEN FINISHED GRADE IS GREATER THAN 6" BELOW EXISTING GRADE)

NOTE: (1) PRUNE BRANCHES OF TREE AS REQUIRED TO COMPENSATE FOR LOST ROOTS.
 (2) IF MORTAR USED IN WALL CONSTRUCTION PROVIDE 1" Ø WEEP HOLES 2'-0" c/c BASE OF WALL.

WASHINGTON
 SUBURBAN
 SANITARY
 COMMISSION

APPROVED: 7-26-21

 Chief Engineer

STANDARD DETAIL
 TREE PROTECTION
 DETAILS

SC
 17.0